



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>5</sup> :</b> <b>A21D 2/22, 8/02, A21C 1/00</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 93/17561</b> <b>(43) International Publication Date:</b> 16 September 1993 (16.09.93)
<b>(21) International Application Number:</b> PCT/GB93/00471 <b>(22) International Filing Date:</b> 5 March 1993 (05.03.93)  <b>(30) Priority data:</b> 9204883.4                      5 March 1992 (05.03.92)                      GB  <b>(71) Applicant (for all designated States except US):</b> APV CORPORATION LIMITED [GB/GB]; Manor Drive, Paston Parkway, Peterborough PE4 7AP (GB).  <b>(72) Inventor; and</b> <b>(75) Inventor/Applicant (for US only) :</b> COLLINS, Thomas, Hylton [GB/GB]; 7 Yarrowside, Little Chalfont, Buckinghamshire HP7 9QL (GB).  <b>(74) Agents:</b> SHERRARD-SMITH, Hugh et al.; Appleyard Lees, 15 Clare Road, Halifax, West Yorkshire HX1 2HY (GB).		<b>(81) Designated States:</b> AU, JP, NZ, US, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).  <b>Published</b> <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>
<b>(54) Title:</b> DOUGH MIXING  <b>(57) Abstract</b>  The invention relates to a dough mixing method for use in breadmaking, which comprises mixing together dough ingredients, including ascorbic acid as an improver, in the presence of air or an oxygen-containing gas. The mixing provides sufficient mechanical energy for a sufficient time to develop the gluten in the dough. Excess pressure is applied to the atmosphere around the dough during a first phase of the mixing, and then a reduced pressure is applied during a second phase. Apparatus for carrying out the method is also provided.		

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	FR	France	MR	Mauritania
AU	Australia	GA	Gabon	MW	Malawi
BB	Barbados	GB	United Kingdom	NL	Netherlands
BE	Belgium	GN	Guinea	NO	Norway
BF	Burkina Faso	GR	Greece	NZ	New Zealand
BG	Bulgaria	HU	Hungary	PL	Poland
BJ	Benin	IE	Ireland	PT	Portugal
BR	Brazil	IT	Italy	RO	Romania
CA	Canada	JP	Japan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SK	Slovak Republic
CI	Côte d'Ivoire	LI	Liechtenstein	SN	Senegal
CM	Cameroon	LK	Sri Lanka	SU	Soviet Union
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	MC	Monaco	TG	Togo
DE	Germany	MG	Madagascar	UA	Ukraine
DK	Denmark	ML	Mali	US	United States of America
ES	Spain	MN	Mongolia	VN	Viet Nam
FI	Finland				

- 1 -

DOUGH MIXING

This invention relates to dough mixing, and in particular to improvements in dough mixing to maximise the utilisation of ascorbic acid as a bread improver.

The baking industry makes use of improvers for the control of loaf quality and to enable better production of bread using fast processes in modern highly mechanised plants. The use of improvers is not exclusive to large scale production, though the subject of this invention applies more to large scale than any other.

On 1st April 1990 permission to continue to use the improver potassium bromate was withdrawn by the U.K. Government. A similar action has either already taken place in other developed countries or could do so in the foreseeable future.

Bromate was a very versatile improver, acting under all the conditions commonly in use for breadmaking. In particular, it did not require to be converted into another compound to work as an improver, it was unaffected by the atmosphere in the mixing machine bowl and there was synergism between it and ascorbic acid, the other most widely used improver.

The U.K. baking industry now has a choice of only three oxidising improvers, ascorbic acid, azodicarbonamide and chlorine dioxide (a gas treatment used only occasionally at the end of flour milling). Ascorbic acid, which is vitamin C, is the preferred improver, it is the only improver allowed in many countries, including all of the EC. However, it has characteristics which are difficult to deal with in some breadmaking circumstances.

SUBSTITUTE SHEET

- 2 -

During mixing air is incorporated into the dough, and the oxygen in the air converts the ascorbic acid to dehydroascorbic acid, which is the true oxidising improver. Industrial bakers now have breadmaking problems which are caused by insufficient improvement from ascorbic acid. Though azodicarbonamide is an alternative to ascorbic acid, it is generally less acceptable to consumers and more difficult to control in the bakery because of its rapid and powerful improver action. Some bakers choose not to use azodicarbonamide. Improver chlorine dioxide is very weak, cannot be applied at the bakery and could not, on its own, provide all the improver function required.

The consequences of sub-optimal oxidising improver action are lower loaf volume, increased firmness of the whole loaf and slice (interpreted by consumers as staleness), duller crumb colour and less acceptable eating quality. The extent of the problem is widespread within the UK and will affect breadmaking in all countries using rapid processes with ascorbic acid as the only improver. It is of particular importance where loaf crumb structure is required to be uniform.

In modern breadmaking processes mixing is much more than the homogenous incorporation of the recipe ingredients into a dough. During dough mixing there are three essential factors which must occur simultaneously, as follows:

30

1. There must be mechanical energy expended at an intensity which is sufficient to develop gluten derived from both the natural protein in flour and from any dried gluten added to raise the flour performance. A high speed, highly powered mixing

35

SUBSTITUTE SHEET

- 3 -

- 5 machine is required with the ability to impart an energy level of about 11Wh/kg of dough. To be effective the intensity of mixing must impart the required work input in a total mixing time not exceeding about 4 minutes. This mixing machinery is commonly available and used to produce about 80% of all bread made in the UK. Similar machines are in use in about 30 countries.
- 10 2. During mixing air must be mixed into dough to create bubble nuclei and to provide oxygen which is essential for the conversation of ascorbic acid to dehydroascorbic acid (the true oxidising improver). The oxidising improver gives stability to gluten development. The mixing action is required to both
- 15 beat air in and subdivide it into a uniform structure of very small cells. Oxygen from the air in the dough bubbles is quickly removed by yeast in the recipe, which leaves nitrogen gas to nucleate the structure. The nitrogen bubbles in dough are
- 20 expanded as carbon dioxide produced by yeast fermentation diffuses into them. When the expanded structure is set during baking it becomes the crumb structure of the loaf.
- 25 3. The correct subdivision of air in dough during mixing, required to produce a uniform loaf structure acceptable for most breads, is essential but difficult to achieve. It is substantially more
- 30 successful when a partial vacuum is applied during mixing. This produces bubbles of smaller diameter which have greater stability during subsequent machining. The application of a partial vacuum removes air which in turn decreases oxidation from
- 35 ascorbic acid and adversely affects oxidising

**SUBSTITUTE SHEET**

- 4 -

improvement required for dough development and bubble structure stability.

Restricting air incorporation during mixing, by  
5 applying a partial vacuum, did not matter when bromate and ascorbic acid could be used together. It is a problem when ascorbic acid is on its own. Bakers now have loaf volume and structure problems caused by insufficient oxidation from the improver. Bakers try to cover-up these  
10 loaf problems by the use of more expensive higher protein flour, adding emulsifier, increasing enzyme addition and sometimes by taking all three of these measures. However, these measures do not provide a satisfactory solution to the problem.

15

It is known that improver action from ascorbic acid can be increased by delaying the application of partial vacuum until about the second half of mixing. That means mixing at atmospheric pressure for about 2 minutes and  
20 pulling partial vacuum for the remainder of the time until the required work input has been achieved, approximately a further 2 minutes in a large size machine. Structure control is not quite as good as when there is partial vacuum throughout mixing, but oxidising improver action is  
25 better, though less than optimum.

The present invention provides a solution to the problem outlined above by the application of a pressure/vacuum sequence to provide adequate air in the  
30 atmosphere during the first phase for ascorbic acid conversion to dehydroascorbic acid, followed by rapid application of partial vacuum for bubble structure control.

**SUBSTITUTE SHEET**



- 5 -

The invention thus provides a dough mixing method for use in breadmaking, which comprises mixing together dough ingredients, including ascorbic acid as an improver, in the presence of air or an oxygen-containing gas, the mixing providing sufficient mechanical energy for a sufficient time to develop the gluten in the dough, characterised in that excess pressure is applied to the atmosphere around the dough during a first phase of the mixing, and then a reduced pressure is applied during a second phase.

The invention also provides apparatus for carrying out the above method, comprising a mixing chamber having a mixing element and a lid which is movable between open and closed positions, the lid being capable of making sealing contact with the chamber when in the closed position, characterised in that means are provided for successively applying excess pressure and then reduced pressure to the interior of the mixing chamber when the lid is closed.

The mixing machine bowl is a pressure vessel also capable of withstanding a high partial vacuum. External to the mixing chamber is another pressure/vacuum chamber with a valve connecting it to the mixing vessel.

In operation the external pressure vessel is pressurised while the mixing vessel is loaded with ingredients. At the start of mixing, pressure from the external pressure vessel is transferred to the mixing machine bowl for the first part of mixing to encourage oxidising improvement from ascorbic acid. While this is taking place the external vessel creates a partial vacuum enabling rapid change-over in the mixing vessel from pressure to partial vacuum to create the desired bubble

SUBSTITUTE SHEET

- 6 -

structure. After transfer of vacuum the external vessel is again pressurised and so on.

5 The invention enables better improvement from ascorbic acid, resulting in maximum performance of flour properties, and control of bubble structure. Further exploitation of partial vacuum, which under these combined conditions could be used at lower pressure to further improve dough machining and handling properties, may be  
10 possible.

A preferred method of mixing is to operate the mixing elements in opposite directions during the pressure and vacuum stages. During the pressure stage, mixing action  
15 should beat air into the dough structure by having a wide face to the mixing element moving into the dough. During the vacuum stage the leading edges of the mixing element have a cutting action to subdivide and open large bubbles for air removal by vacuum.

20

The invention can also be used with other gases and combinations of oxygen and air to provide higher oxygen concentration in the mixing machine headspace, already known to be successful at atmospheric pressure.

25

Reference is now made to the accompanying drawings, in which:

Figure 1 is a diagrammatic representation of one  
30 embodiment of apparatus for use in the present invention; and

Figure 2 is a diagrammatic representation of another embodiment of apparatus for use in the invention.

35

**SUBSTITUTE SHEET**



- 7 -

Figure 1 shows a mixer bowl 1 provided with a reversible beater drive 2. The bowl is provided with a lid 3 which can be opened for the entry and removal of mixing ingredients. In the closed position, the lid is sealed to the rim of the bowl so that the bowl then becomes a pressure/vacuum-tight container. The bowl 1 is provided with first and second pipelines 4 and 5 respectively. The first pipeline 4 is provided with an adjustable pressure relief valve 6 which is adapted to release pressure from the bowl if it rises above a safe limit. The pipeline 5 is provided with a valve 7 and communicates between the interior of the bowl 1 and a pressure/vacuum tank 8. The tank 8 is in turn provided with a pressure/vacuum supply 9.

In use, the dough ingredients are placed in the bowl 1 and the lid 3 is sealed. The tank 8 has previously been placed under pressure, and the valve 7 is opened to increase the pressure in the bowl 1. The valve 7 is then closed, and the dough ingredients are mixed in the bowl 1 by the beater. In the meanwhile, the tank 8 is evacuated. After a suitable time interval, while mixing in the bowl 1 is continued, excess pressure is released through the valve 6. The valve 6 is then closed and the valve 7 is opened to reduce the pressure in the bowl 1. The valve 7 is closed and the tank 8 is returned to atmospheric pressure. After completion of mixing, the valve 7 is opened to return the interior of the bowl 1 to atmospheric pressure. The lid 3 is opened and the mixed dough is removed.

When the pressure in the bowl 1 is changed from excess pressure to reduced pressure, the direction of rotation of the beater drive 2 is reversed. The blades of the beater have thick edges on one side and narrow cutting

SUBSTITUTE SHEET

- 8 -

edges on the opposite side. During the excess pressure phase, the thick edges are the leading edges. During the reduced pressure phase, the thin edges are the leading edges.

5

The apparatus shown in Figure 2 is generally similar in construction and operation to that of Figure 1, and corresponding members have the same reference numerals. However, in Figure 2, a pressure/vacuum tank is not employed, and instead the pipeline 5 communicates directly with a vacuum/pressure device 10 which is capable of increasing pressure or pulling a vacuum directly to the interior of the mixer bowl 1.

15

The invention is further illustrated by the following example of breadmaking by the Chorleywood Bread process (CBP) adapted according to the present invention.

**SUBSTITUTE SHEET**

- 9 -

**EXAMPLE**

	Breadmaking process:	CBP
5	Bread type:	800g, white, four-piece, lidded, long-loaf.
	Mixing machine:	High-speed.
10	Recipe:	% of flour weight
	Flour	100
	Yeast	2.5
	Salt	2.0
15	Water	62.0
	Fat	1.0
	Improver	1.0
20	Dough processing:	
	Mixing machine:	High-speed
	Work input:	Up to 11 Wh/kg
	First stage of mixing	
25	Pressure:	Up to 3 Bar, typically 1.5 to 2.0 Bar
	Mixing element:	Direction for beating in air preferred
30	Second stage of mixing	
	Pressure:	Partial vacuum, typically 0.5 to 0.25 Bar
	Mixing element:	Direction to cut through dough preferred
35	Dough temperature:	30.5 +/- 1°C
	Scaling:	850 to 930g
	First moulding:	Into a Ball by Conical moulder
	First proof:	2 to 6 min at ambient temperature
40	Final:	Four-piece
	Pan size:	Approx Top 250mm x 122mm, 125mm deep
	Shape:	Lidded
45	Proving conditions:	About 43°C, humidity to prevent skinning
	Proving height:	About 2cm below pan lip
	Baking temperature:	Average 240 to 250°C
	Oven type:	Various
	Baking time:	18 to 30 min
50	Baking humidity:	Steam injected as required
	Cooling:	)As appropriate for the variety
	Storage:	)

SUBSTITUTE SHEET

- 10 -

CLAIMS

1. A dough mixing method for use in breadmaking, which comprises mixing together dough ingredients, including ascorbic acid as an improver, in the presence of air or an oxygen-containing gas, the mixing providing sufficient mechanical energy for a sufficient time to develop the gluten in the dough, characterised in that excess pressure is applied to the atmosphere around the dough during a first phase of the mixing, and then a reduced pressure is applied during a second phase.
2. A method according to claim 1, in which the total energy provided by the mixing is from 5 to 20 Wh/kg of dough over a total mixing time of from 1 to 6 minutes.
3. A method according to claim 1 or 2, in which the first and second phase of mixing each last for 1 to 3 minutes.
4. A method according to any of claims 1 to 3, in which the pressure applied during the first phase is in the range of from 1.05 Bar to 3.0 Bar.
5. A method according to any of claims 1 to 4, in which the pressure applied during the second phase is in the range of from 0.5 Bar to 0.25 Bar.
6. A method according to any of claims 1 to 5, in which ascorbic acid is the sole oxidising improver in the dough and the mixing is carried out in the presence of air.
7. Apparatus for carrying out a method according to any preceding claim, comprising a mixing chamber having a mixing element and a lid which is movable between open and

SUBSTITUTE SHEET

- 11 -

closed positions, the lid being capable of making sealing contact with the chamber when in the closed position, characterised in that means are provided for successively applying excess pressure and then reduced pressure to the interior of the mixing chamber when the lid is closed.

8. Apparatus according to claim 7, in which the mixing chamber is in communication with a pressure/vacuum chamber by way of a valve means, whereby, by opening the valve means, pressure in the mixing chamber can be increased or vacuum obtained, and then maintained in the mixing chamber by closing the valve means.

9. Apparatus according to claim 7 or 8, in which the mixing element is a rotatable shaft having stirrer blades with a relatively wide edge on one side and relatively narrow edge on an opposing side, and the direction of rotation is reversible, so that the leading edges of the blades during mixing can be selected to be relatively wide or relatively narrow.

SUBSTITUTE SHEET

1/1

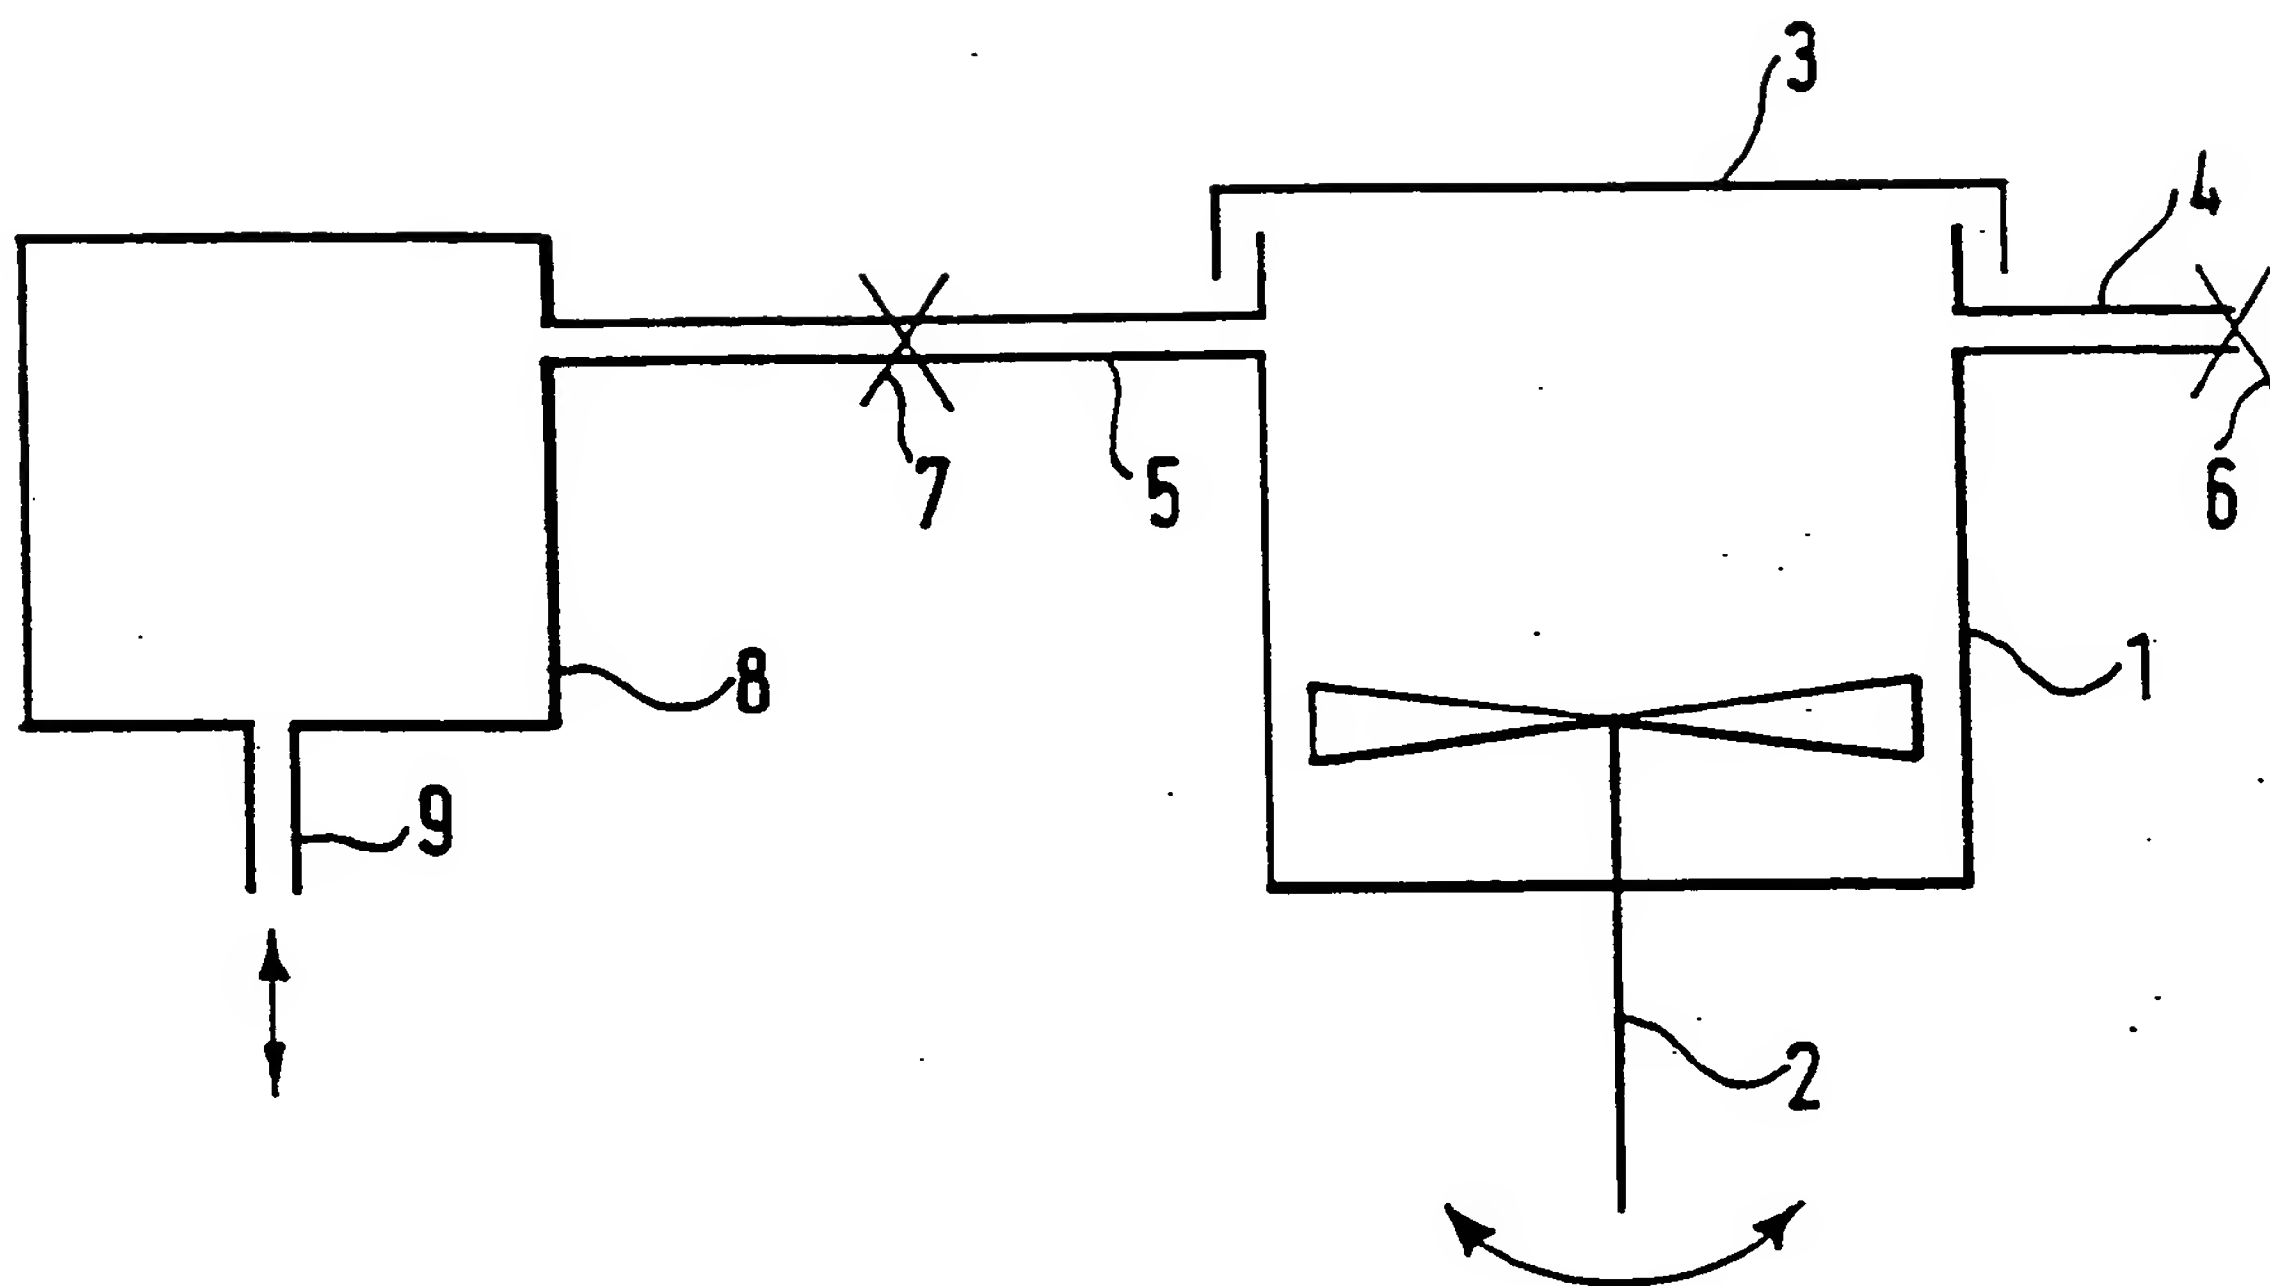


Fig.1.

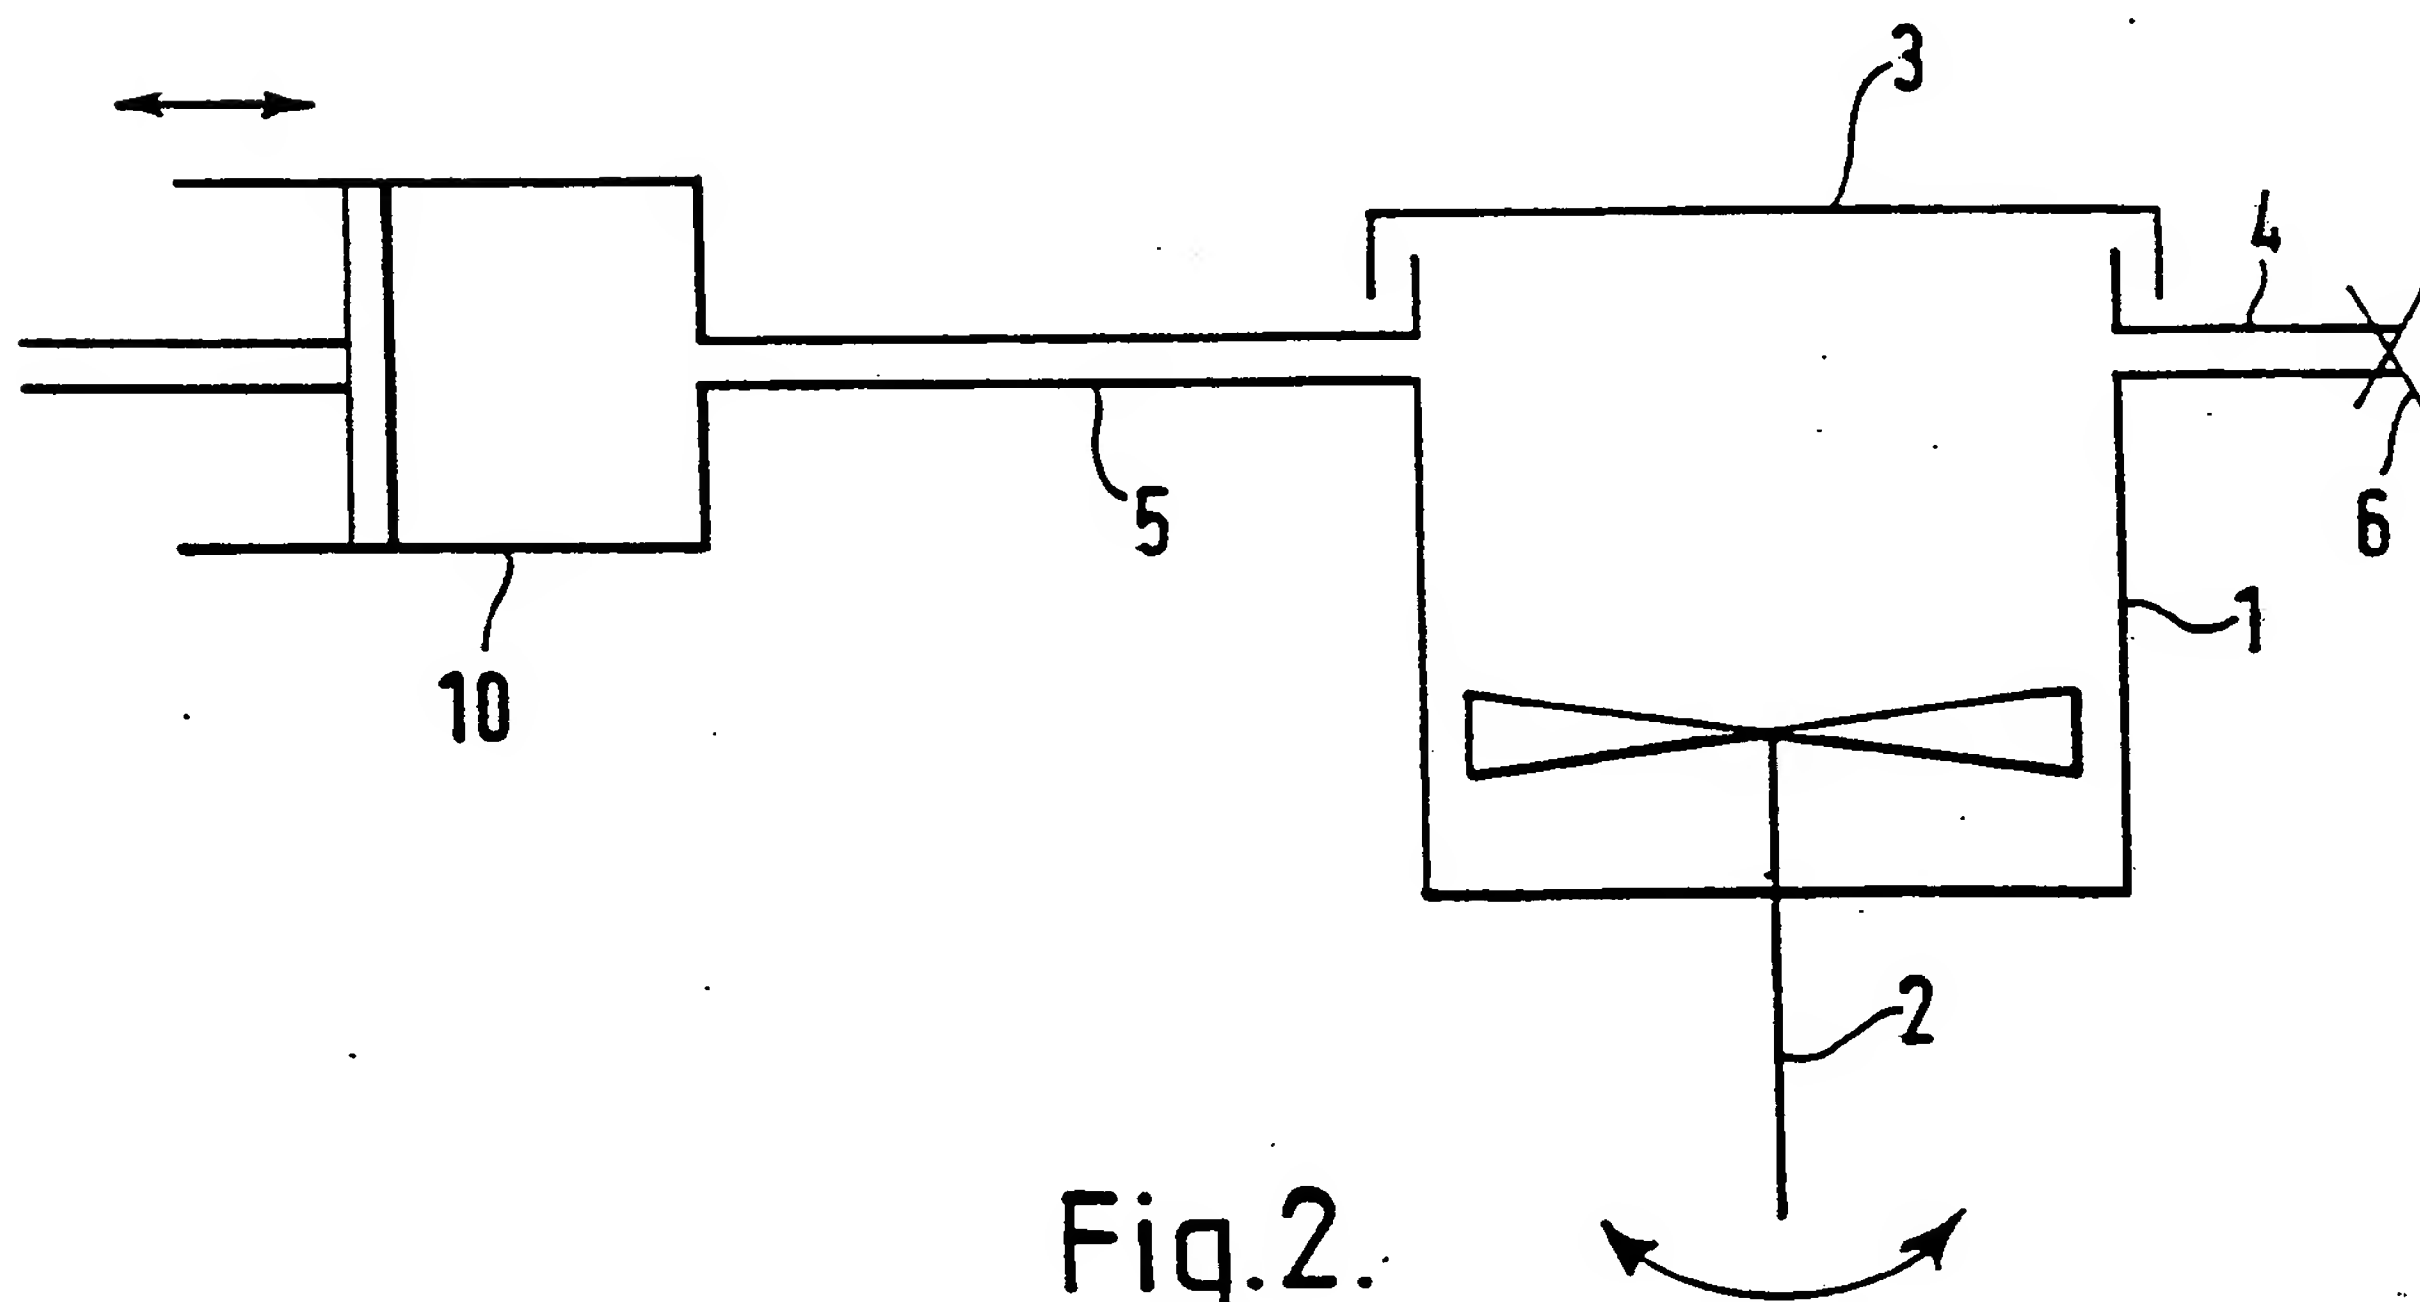


Fig.2.

SUBSTITUTE SHEET



# INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 93/00471

<b>I. CLASSIFICATION OF SUBJECT MATTER</b> (If several classification symbols apply, indicate all) <sup>6</sup> According to International Patent Classification (IPC) or to both National Classification and IPC Int.Cl. 5 A21D2/22;                      A21D8/02;                      A21C1/00																				
<b>II. FIELDS SEARCHED</b> <div style="text-align: center; margin-top: 10px;">Minimum Documentation Searched<sup>7</sup></div> <table border="1" style="width: 100%; border-collapse: collapse; margin-top: 5px;"> <tr> <th style="width: 25%;">Classification System</th> <th style="width: 75%;">Classification Symbols</th> </tr> <tr> <td style="padding: 5px;">Int.Cl. 5</td> <td style="padding: 5px;">A21D ;              A21C ;              B28C ;              B01F</td> </tr> </table> <div style="text-align: center; margin-top: 10px;">Documentation Searched other than Minimum Documentation to the Extent that such Documents are Included in the Fields Searched<sup>8</sup></div>			Classification System	Classification Symbols	Int.Cl. 5	A21D ;              A21C ;              B28C ;              B01F														
Classification System	Classification Symbols																			
Int.Cl. 5	A21D ;              A21C ;              B28C ;              B01F																			
<b>III. DOCUMENTS CONSIDERED TO BE RELEVANT<sup>9</sup></b> <table border="1" style="width: 100%; border-collapse: collapse; margin-top: 5px;"> <thead> <tr> <th style="width: 10%;">Category<sup>10</sup></th> <th style="width: 70%;">Citation of Document,<sup>11</sup> with indication, where appropriate, of the relevant passages<sup>12</sup></th> <th style="width: 20%;">Relevant to Claims No.<sup>13</sup></th> </tr> </thead> <tbody> <tr> <td style="text-align: center; vertical-align: top; padding: 5px;">Y</td> <td style="padding: 5px;">           EP,A,0 246 768 (THE BOC GROUP PLC)            25 November 1987            see column 6, line 31 - column 6, line 44;            claims         </td> <td style="text-align: center; vertical-align: top; padding: 5px;">1-3,6-8</td> </tr> <tr> <td style="text-align: center; vertical-align: top; padding: 5px;">Y</td> <td style="padding: 5px;">           ---            GB,A,1 044 616 (G. &amp; R. GILBERT LIMITED)            5 October 1966            see the whole document         </td> <td style="text-align: center; vertical-align: top; padding: 5px;">1-3,6-8</td> </tr> <tr> <td style="text-align: center; vertical-align: top; padding: 5px;">A</td> <td style="padding: 5px;">           ---            US,A,4 465 700 (K.M.J. BALL)            14 August 1984            see column 4, line 38 - column 6, line 68;            claims; figures 6-7         </td> <td style="text-align: center; vertical-align: top; padding: 5px;">1-3,5, 7-9</td> </tr> <tr> <td style="text-align: center; vertical-align: top; padding: 5px;">A</td> <td style="padding: 5px;">           ---            GB,A,931 637 (F.J. SUNTHEIMER)            17 July 1963            see claims         </td> <td style="text-align: center; vertical-align: top; padding: 5px;">1,4,7</td> </tr> <tr> <td colspan="3" style="text-align: center; padding: 10px;">-/-</td> </tr> </tbody> </table>			Category <sup>10</sup>	Citation of Document, <sup>11</sup> with indication, where appropriate, of the relevant passages <sup>12</sup>	Relevant to Claims No. <sup>13</sup>	Y	EP,A,0 246 768 (THE BOC GROUP PLC) 25 November 1987 see column 6, line 31 - column 6, line 44; claims	1-3,6-8	Y	--- GB,A,1 044 616 (G. & R. GILBERT LIMITED) 5 October 1966 see the whole document	1-3,6-8	A	--- US,A,4 465 700 (K.M.J. BALL) 14 August 1984 see column 4, line 38 - column 6, line 68; claims; figures 6-7	1-3,5, 7-9	A	--- GB,A,931 637 (F.J. SUNTHEIMER) 17 July 1963 see claims	1,4,7	-/-		
Category <sup>10</sup>	Citation of Document, <sup>11</sup> with indication, where appropriate, of the relevant passages <sup>12</sup>	Relevant to Claims No. <sup>13</sup>																		
Y	EP,A,0 246 768 (THE BOC GROUP PLC) 25 November 1987 see column 6, line 31 - column 6, line 44; claims	1-3,6-8																		
Y	--- GB,A,1 044 616 (G. & R. GILBERT LIMITED) 5 October 1966 see the whole document	1-3,6-8																		
A	--- US,A,4 465 700 (K.M.J. BALL) 14 August 1984 see column 4, line 38 - column 6, line 68; claims; figures 6-7	1-3,5, 7-9																		
A	--- GB,A,931 637 (F.J. SUNTHEIMER) 17 July 1963 see claims	1,4,7																		
-/-																				
<div style="display: flex; justify-content: space-between;"> <div style="width: 45%;"> <p><sup>10</sup> Special categories of cited documents:</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> </div> <div style="width: 45%;"> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"A" document member of the same patent family</p> </div> </div>																				
<b>IV. CERTIFICATION</b> <table border="1" style="width: 100%; border-collapse: collapse; margin-top: 5px;"> <tr> <td style="width: 50%; padding: 5px;">           Date of the Actual Completion of the International Search  <div style="text-align: center; margin-top: 10px;">05 JULY 1993</div> </td> <td style="width: 50%; padding: 5px;">           Date of Mailing of this International Search Report  <div style="text-align: center; margin-top: 10px;">27. 07. 93</div> </td> </tr> <tr> <td style="width: 50%; padding: 5px;">           International Searching Authority  <div style="text-align: center; margin-top: 10px;">EUROPEAN PATENT OFFICE</div> </td> <td style="width: 50%; padding: 5px;">           Signature of Authorized Officer  <div style="text-align: center; margin-top: 10px;">BEVAN S.R.</div> </td> </tr> </table>			Date of the Actual Completion of the International Search <div style="text-align: center; margin-top: 10px;">05 JULY 1993</div>	Date of Mailing of this International Search Report <div style="text-align: center; margin-top: 10px;">27. 07. 93</div>	International Searching Authority <div style="text-align: center; margin-top: 10px;">EUROPEAN PATENT OFFICE</div>	Signature of Authorized Officer <div style="text-align: center; margin-top: 10px;">BEVAN S.R.</div>														
Date of the Actual Completion of the International Search <div style="text-align: center; margin-top: 10px;">05 JULY 1993</div>	Date of Mailing of this International Search Report <div style="text-align: center; margin-top: 10px;">27. 07. 93</div>																			
International Searching Authority <div style="text-align: center; margin-top: 10px;">EUROPEAN PATENT OFFICE</div>	Signature of Authorized Officer <div style="text-align: center; margin-top: 10px;">BEVAN S.R.</div>																			

III. DOCUMENTS CONSIDERED TO BE RELEVANT (CONTINUED FROM THE SECOND SHEET)		
Category °	Citation of Document, with indication, where appropriate, of the relevant passages	Relevant to Claim No.
A	GB,A,1 110 407 (GEORGE TWEEDY & COMPANY LIMITED) 18 April 1968 see the whole document	1,5,7
A	--- GB,A,2 056 293 (AMSTED INDUSTRIES INC.) 18 March 1981 see figure 3 -----	9

Form PCT/ISA/210 (extra sheet) (January 1985)

**ANNEX TO THE INTERNATIONAL SEARCH REPORT  
ON INTERNATIONAL PATENT APPLICATION NO.**

GB 9300471  
SA 71924

This annex lists the patent family members relating to the patent documents cited in the above-mentioned international search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

05/07/93

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP-A-0246768	25-11-87	AU-B- 602897	01-11-90
		AU-A- 7316087	26-11-87
		CA-A- 1306247	11-08-92
		DE-A- 3782453	10-12-92
		JP-A- 63032436	12-02-88
-----			
GB-A-1044616		None	
-----			
US-A-4465700	14-08-84	None	
-----			
GB-A-931637		None	
-----			
GB-A-1110407		None	
-----			
GB-A-2056293	18-03-81	None	
-----			

EPO FORM P0079

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**THIS PAGE BLANK (USPTO)**